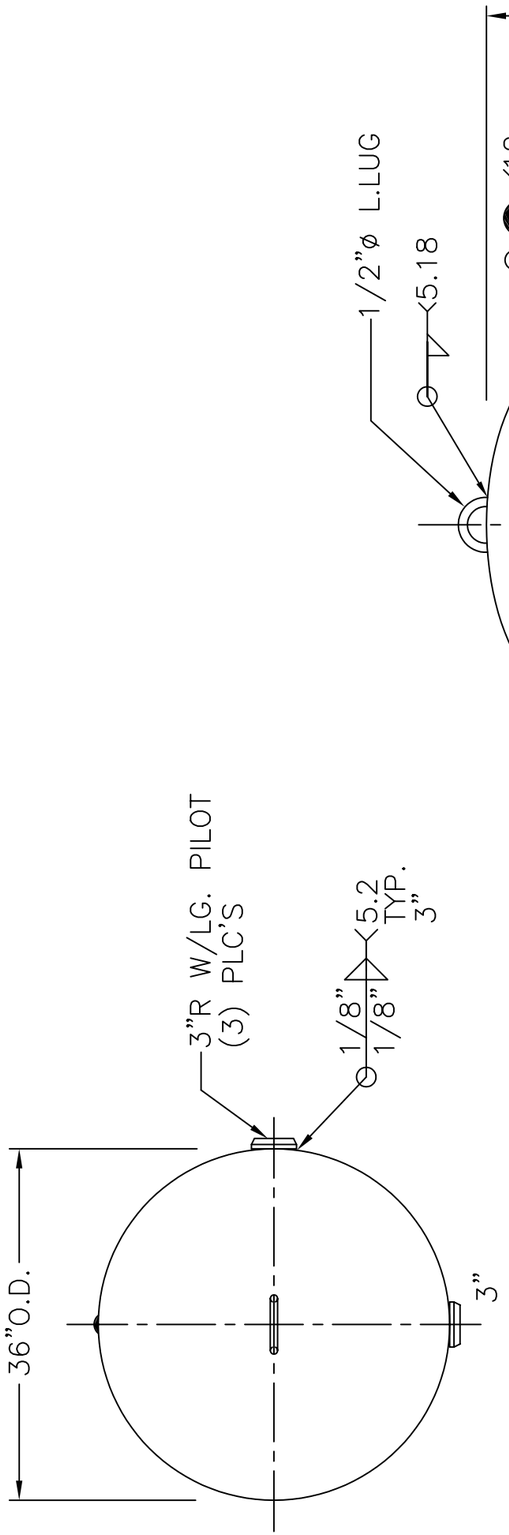

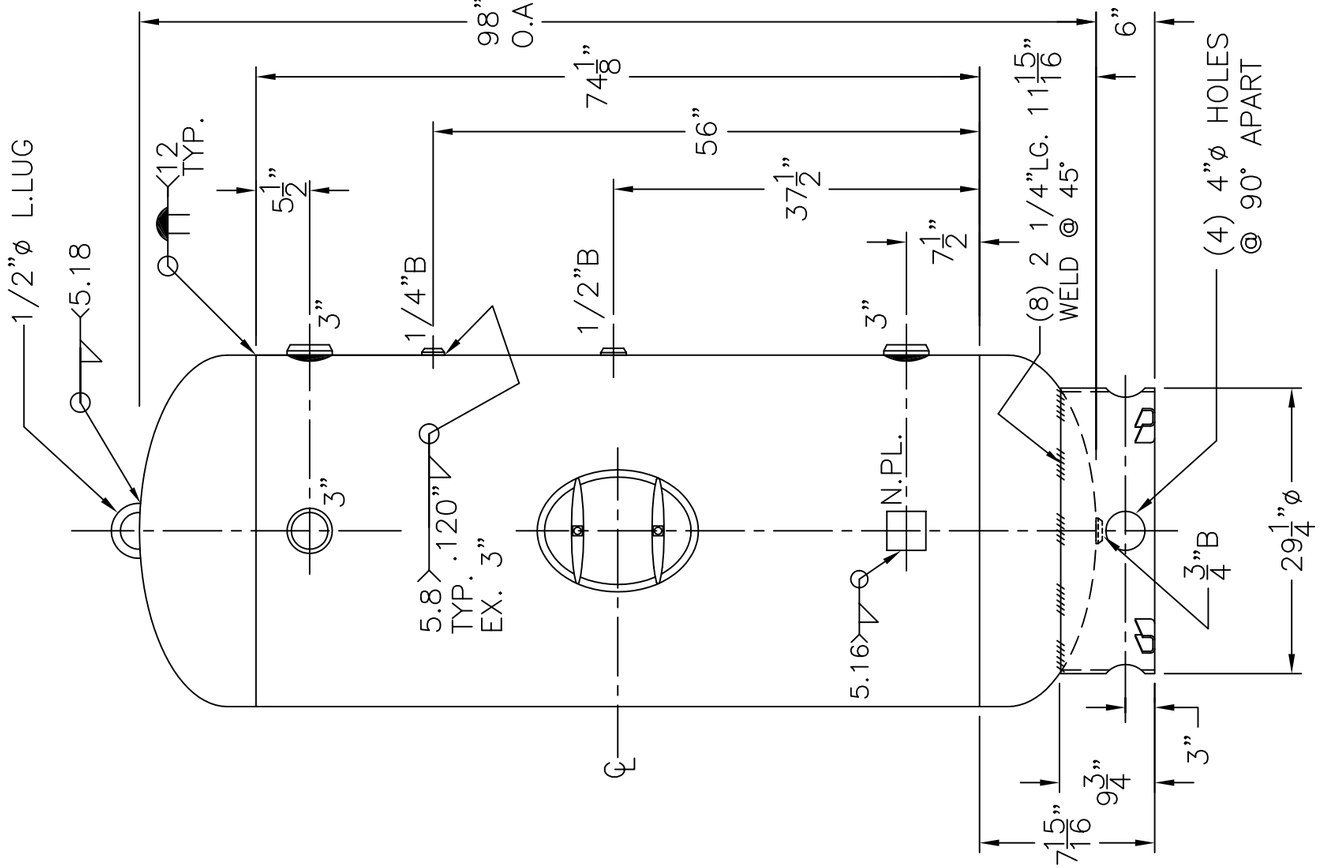

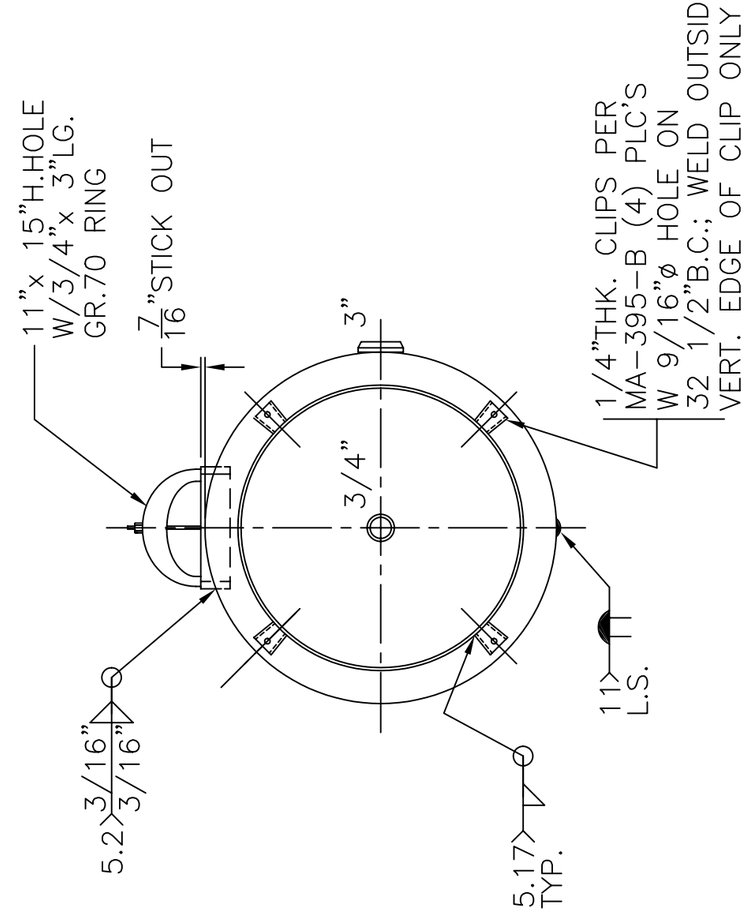

4) UG-46(f)(6)
3) NO CORROSION ALLOWANCE PROVIDED.
2) UG-20(f) EXEMPT FROM IMPACT TESTING.
NOTE: 1) HYDRO @ 179 PSIG. MIN.

SHELL / HEADS	.182" SA-455 2:1 S.E.	0-36-VQ-400-R	REV. 11-17-04
	JOGGLE		DATE: 10-27-92
		FOR: HANSON STANDARD	
		VERT. AIR TANK	
	.166" SA-414-G	CRN-ALBERTA	
		SURFACE AREA = 81.4 SQ. FT.	
		INSIDE: EPOXY LINED	
M.A.W.P.	137 PSIG. @ 200 °F		
M.D.M.T.	-20 °F @ 137 PSIG.	OUTSIDE: PRIME	
ASME. SECTION VIII	DIV. 1, 2001 ADD 2002	CAD-"B" SIZE UNDER "0"-SERIES	
X-RAY:	RT-NO	BY: E.S.	SCALE:3/4"=12"
GALLONS: 400	WT. 692 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		1924 COMPTON AVE.	
N.B.		LOS ANGELES, CA 90011	