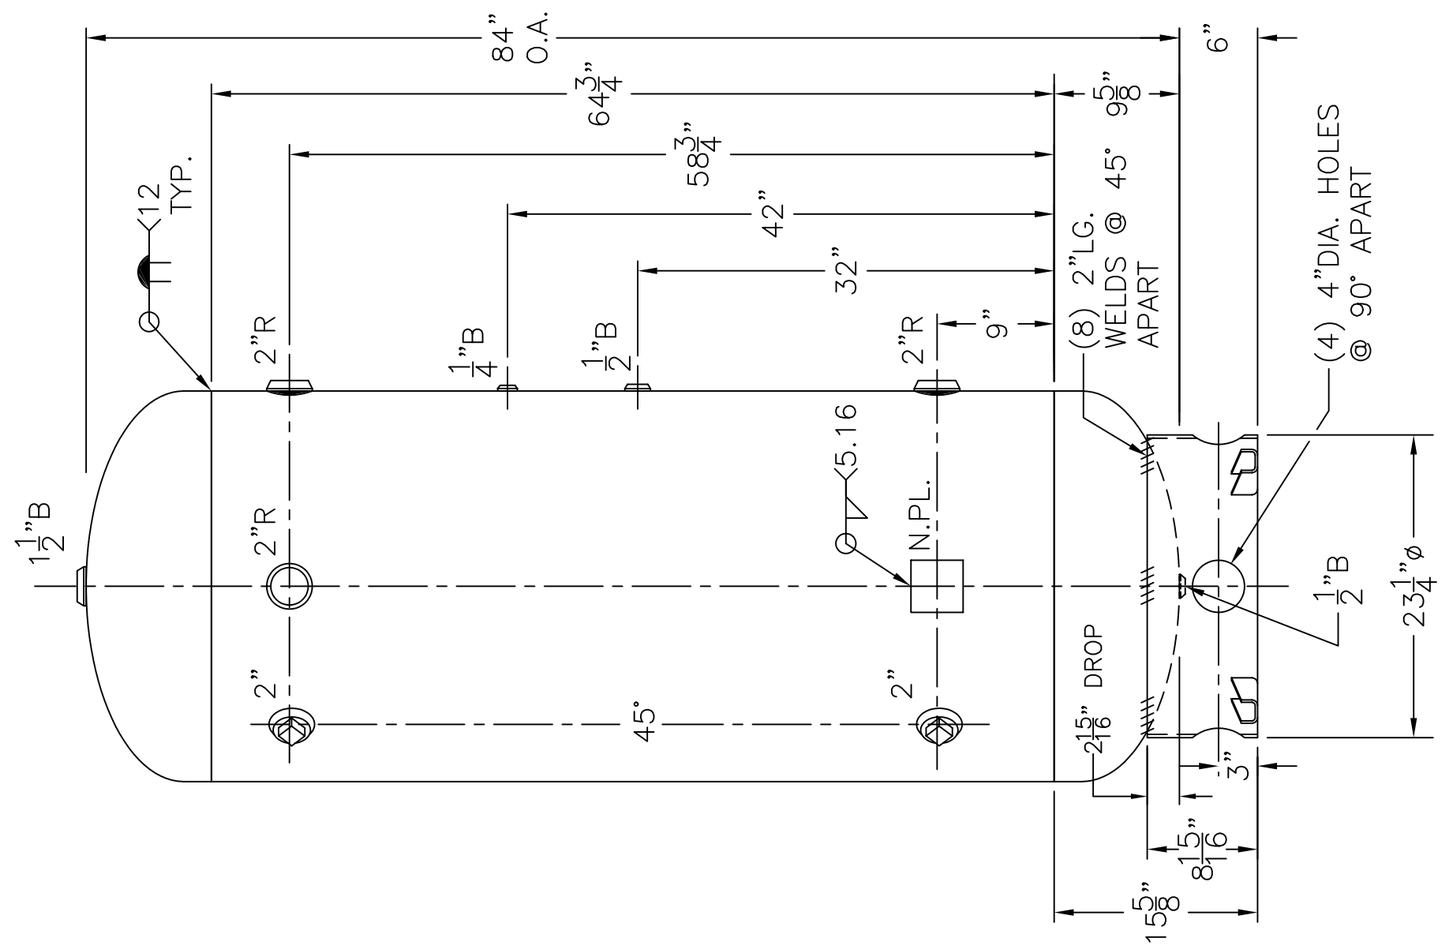

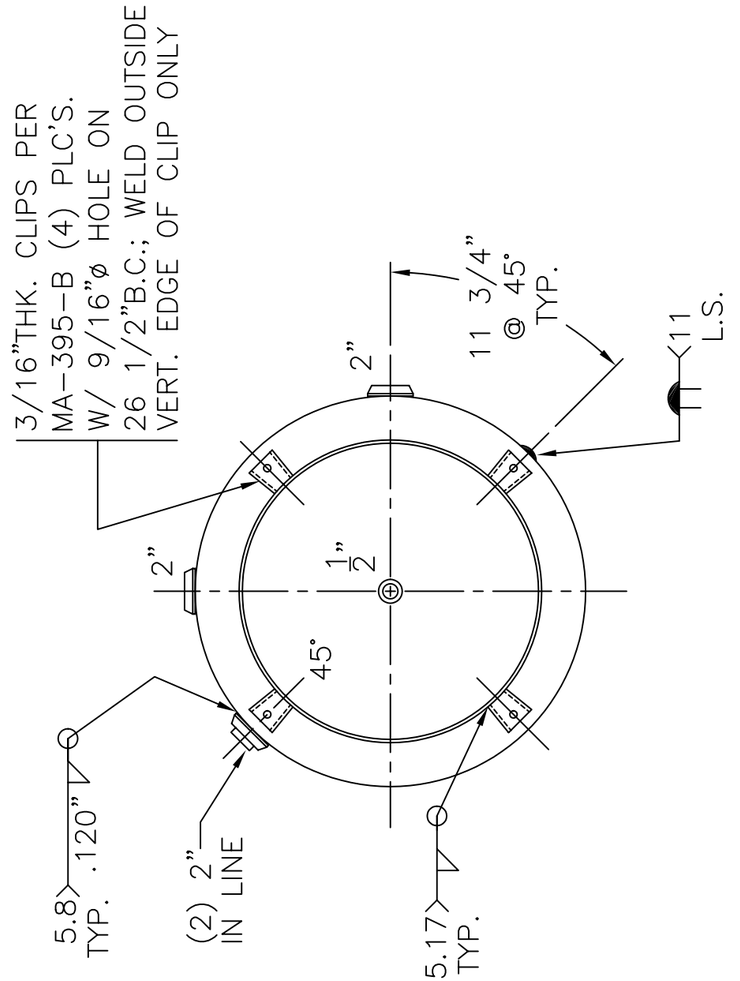

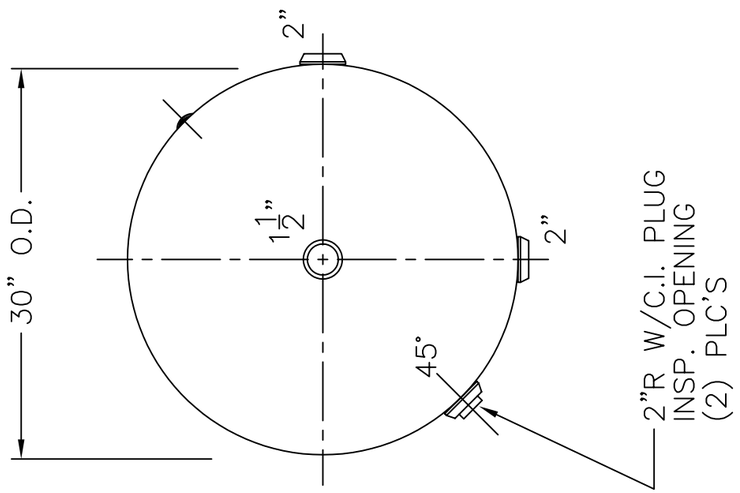

NOTE: 1) HYDRO @ 260 PSIG. MIN.

SHELL / HEADS	.250" SA-455 2:1 S.E.
	(.202" MIN.) JOGGLE
	.259 OFFSET
	.250" SA-455
M.A.W.P. 200 PSIG. @ 400 °F	
M.D.M.T. 0 °F @ 200 PSIG.	
ASME. SECTION VIII DIV. 1, 2004 ADD. 2004	
X-RAY: RT-NO	
GALLONS: 240	WT. 682 LBS.
SERIAL NO.	
N.B.	

30-VA-240-R FOR ABS & USCG	REV. 2-22-05
	DATE: 11-16-04
FOR: HANSON STANDARD	
VERT. AIR TANK	
9-2-80 ABS APPROVAL	
ABS & USCG APPROVED	
INSIDE: UNPAINTED	
OUTSIDE: PRIME	
BY: J.G.	SCALE: 1"=12"

ROY E. HANSON JR. MFG.
1924 COMPTON AVE.
LOS ANGELES, CA 90011